



BD600 Series

High Performance Vector AC Drive

Brochure



■ Introduction


BD600 series is latest version for high performance vector inverter based on BD330. Multiple control modes ,New vector control algorithm can achieve stability at slow speed, stronger load capacity at low frequency. Support SVC,VC and V/F control, and achieved using multiple PG cards. Stronger functions, functional of motor control has clearly raised.




■ Features

➤ Outstanding performance

- 1) Large torque output when low frequency ;
- 2) Fast dynamic response ;
- 3) Super strong overload capacity

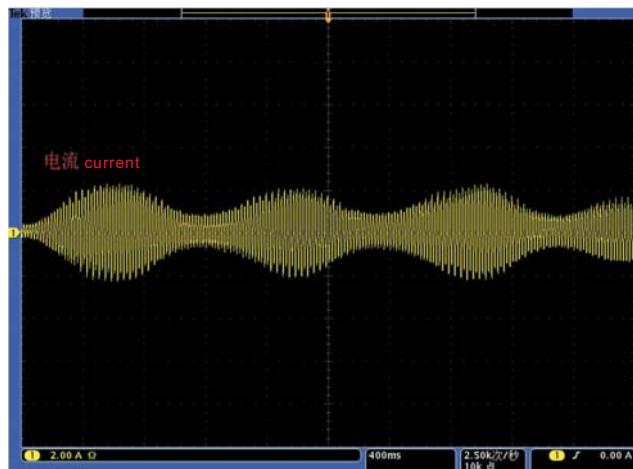

0.5Hz full-load output

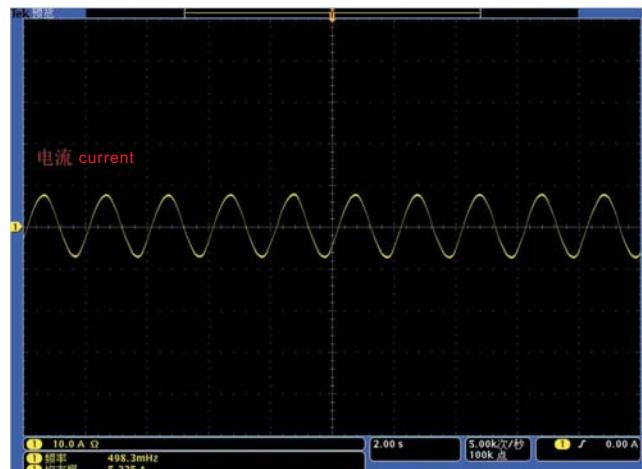

50Hz sudden load

➤ Accurate motor parameter self learning

BD600 series inverter can accurately provide dynamic or static self-learning of motor parameters, simple debugging , easy operating, higher control accuracy and response speed.

Dynamic self-learning


It need release the load, suitable for situation that requiring high control precision

Static self-learning

Applicable to the motor and load cannot release

■ Features


► Rapid current limit

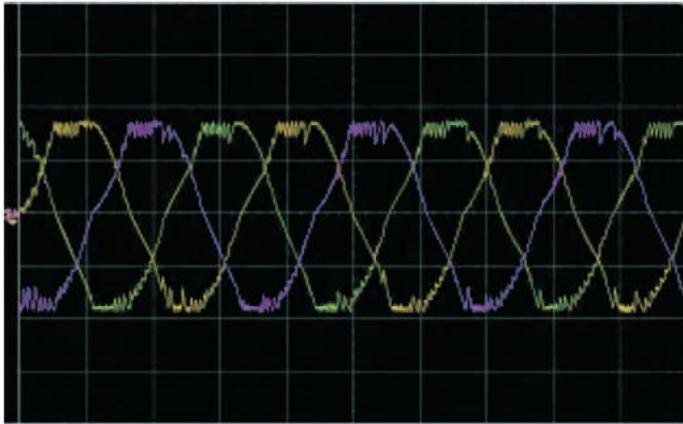


Rapid current limiting function can limit current rapidly within the current protection value, to ensure the safety of the equipment, and avoid over-current alarm caused by sudden loading or interference.

► Over-excitation gain and oscillation suppression gain

Over-excitation brake function valid

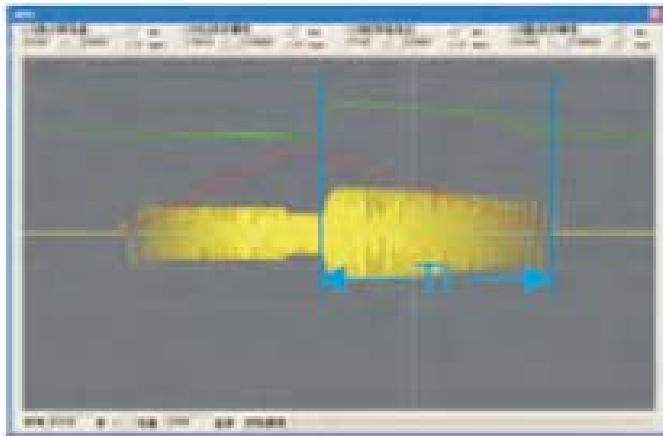

Over-excitation brake function invalid

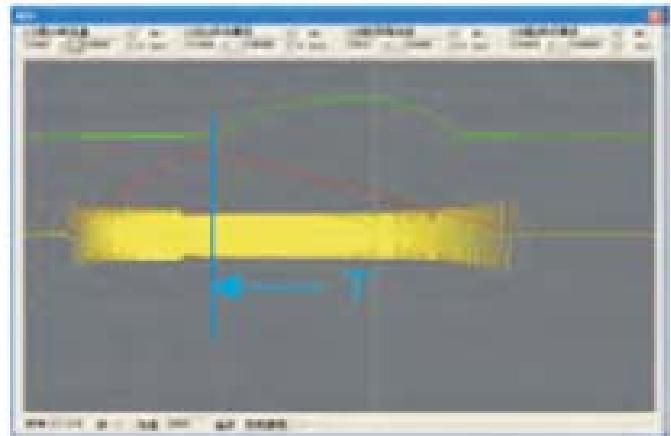

► Rapid RUN/STOP

Excellent current and voltage control technology can realize rapid RUN/STOP, restrain overvoltage and overcurrent.

► Overvoltage stall protection & Overcurrent stall protection

► Support both asynchronous motor and synchronous motor

- 1) asynchronous motor
- 2) synchronous motor (by using extension card)

■ Features

➤ Support multiple control mode

Speed sensorless vector control (SVC), sensor vector control(VC), V/F control



Differential Encoder



Resolver


➤ Flexible and practical analog input/output

Each analog input (AI1 ~ AI3) can set 4 point curves.

➤ High-speed pulse input and output functions

High speed pulse signal specification: voltage range 9V~26V, frequency range 0 ~ 100 KHZ. Can setting 2 point curves, high control precision. HDI/HDO high speed pulse input/output terminal can be used for DI/DO.


➤ Swing frequency control function

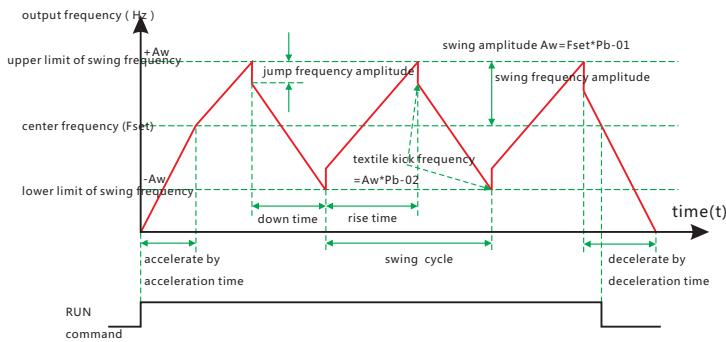


➤ Frequency source binding & compose

Run command source are free to bind any frequency source. 10 kinds of main-auxiliary frequency source, flexible to adjust and compose.

For example : A+B、A-B、AB switch,etc

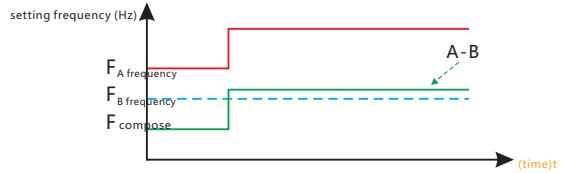

➤ None-stop when instantaneous power off

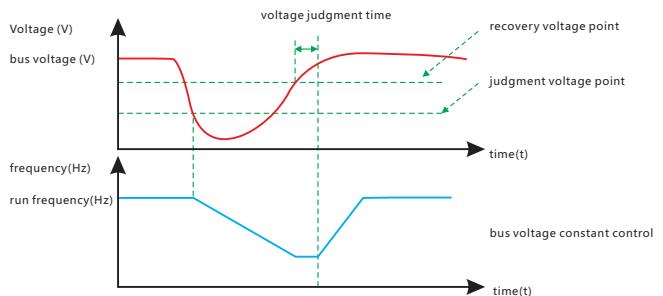

➤ Simple PLC

➤ Multiple motor switch

Two groups of motor parameters, and control two motors by one inverter.



■ Technical Features

I/O Features	Input Voltage Range	1AC220V±15% / 3AC220V±15% / 3AC380V±15% / 3AC660V±10% / 3AC1140V±15%	
	Input Frequency Range	47-63Hz	
	Output Voltage Range	0~rated input voltage	
	Output Frequency Range	0~600Hz	
I/O Terminals	Input Terminals	<ul style="list-style-type: none"> 6 programmable digital inputs, it can be extended to 4 digital inputs, one of which supports high speed pulse input; 1 analog voltage input, -10~10VDC; 2 voltage input 0~10VDC or current input 0~20mA 	
	Output Terminals	<ul style="list-style-type: none"> 1 open collector output ,it can be extended to 1 high speed pulse output ; 2 relay outputs; 2 analog output: voltage output 0~10VDC or current output 0~20mA 	
RUN	Multiple encoder types	A variety of encoder is optional: support differential encoder, ABZ encoder,UVW encoder, rotary transformer	
	Control Mode	Speed sensorless vector control (SVC) , sensor vector control (VC), V/F control	
	Frequency Reference Source	Digital,analog,pulse frequency,serial communication,multi-step speed,simple PLC and PID, The combination of multi-modes and the different modes can be switched.	
	Overload Capacity	<ul style="list-style-type: none"> G type: 60s for 150% of the rated current, 3s for 180% of the rated current P type: 60s for 120% of the rated current, 3s for 150% of the rated current 	
	Start Torque	<ul style="list-style-type: none"> G type: 0.5 Hz/150% (SVC); 0 Hz/180% (VC) P type: 0.5 Hz/100% 	
	Speed Adjusting Range	1:100 (SVC)	1:1000 (VC)
	Speed Accuracy	±0.5% (SVC)	±0.02% (VC)
	Carrier Frequency	0.5 to 16.0kHz; automatically adjust carrier frequency according to the load characteristics	
	Resolution of Frequency setting	Digital setting:0.01Hz	Analog setting:maximum frequency x 0.025%
	Running command source	<ul style="list-style-type: none"> Keyboard Control terminals Serial communication port 	
Functions	Torque Boost	Automatic torque boost;manual torque boost 0.1~30%	
	V/F curve	<ul style="list-style-type: none"> Straight-line V/F curve Multi-point V/F curve Square V/F curve V/F complete separation V/F half separation N-power V/F curve (1.2-power, 1.4-power,1.6-power, 1.8-power) 	
	Acc/Dec Mode	Straight-line or S-curve, Four kinds of acceleration/deceleration time with the range of 0.0~6500.0s	
	DC Braking	<ul style="list-style-type: none"> Supports starting and stopping DC braking DC braking frequency: 0.00 Hz to maximum frequency Braking time: 0.0~100.0s Braking action current value: 0.0%~100.0% 	
	Jogging control	Jog frequency range:0.0Hz to 50Hz; Jog Acc/Dec time:0~6500.0s	
	Simple PLC and Multi-speed operation	Built-in PLC or control terminal,16 steps speed can be set, Hold time and acceleration/deceleration of each step speed can be adjusted	
	Built-in PID	Easy to realize closed-loop control system for the process control	
	Automatic voltage regulation(AVR)	Automatically maintain a constant output voltage when the voltage of electricity grid changes	
	Stop mode selection	<ul style="list-style-type: none"> Decelerate to stop Coast to stop 	
	Torque limit and control	"excavator"character, automatic limit torque when running can prevent over-current trip continually; Vector mode can realize torque control	
	Multi-motor switchover	Equip with two groups of motor parameter, it can realize switching control of two motors	
	Switchover function	Total 10 main and auxiliary frequency source.They can be switched and combined flexibly	



■ Technical Features

	Swing frequency control function	Multiple triangular pulse frequency control
	Common DC bus function	Multiple inverters can use a common DC bus
	Speed tracking function:	Multiple speed trace mode, the speed of trace can be adjusted
	Timing control	Timing setting range 0~6500min
	Fixed length	setting length control
	Jump frequency function	Prevents mechanical resonance and makes the system more stable and reliable
	Protection function	Overvoltage protection, undervoltage protection, overcurrent protection, overload protection, overheat protection, overcurrent stall protection, overvoltage stall protection, phase-loss protection, over-speed detection, motor overheat protection, short-circuit protection.
	Other functions	<ul style="list-style-type: none"> • Parameter restore • Parameter self-learning • PID parameters switchover • PID feedback loss detection • Over-torque and under-torque detection • None-stop when instantaneous power off • Sleep and wake function, etc. • Rapid current limit • Current detection compensation • Fault self-recovery • Backup data for power fail of simple PLC
Communications		RS485
Extension card	I/O extension card, PG card, (Relay extension card and V/I extension card can be customized as your request.)	
PCB coating	Imported conformal protective coating	
Display	LED Display	Can display: setting frequency, output frequency, output voltage, output current etc.
Environmental Constraint	Protection level	IP20
	Temperatue	-10°C~+40°C, it will be derated if ambient emperature exceeds 40°C
	Humidity	Below 90%RH (no condensation)
	Vibration	≤20Hz 9.8m/s(1G), ≥20Hz 5.88m/s(0.6G)
	Altitude	Below 1000m, indoor(place without corrosive gas, liquid)
	Storage temperature	-20°C~+60°C

- Inverter nameplate:

MODEL: BD600-3R7G/5R5P-4	Specification and model
INPUT: 3PH 415V 50/60Hz	Input
OUTPUT: 3PH 0~415V 0~600Hz	Output
POWER: 3.7/5.5kW 8.5/13A	Power
S/N:  01B3413A115251001	Bar code
ZHEJIANG NEW FOLINN ELECTRIC CO.,LTD	Serial number

- Specifications and models:

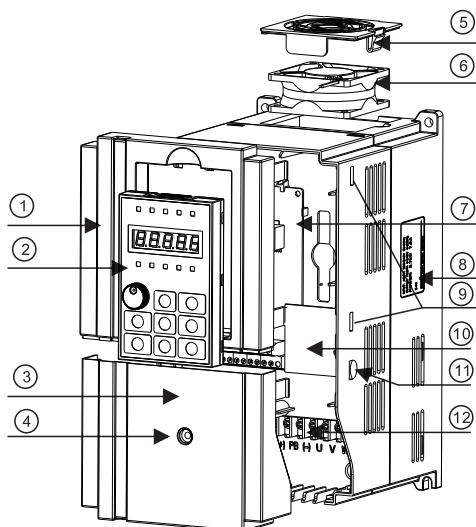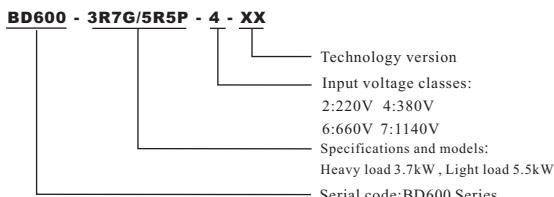


No.	Name	Description
①	Pre-cover	Used for install display keyboard and protect components
②	Keyboard	Used for amend and check inverter parameters, operation and other functions
③	Tail-hood	
④	Retaining screw of tail-hood	Used to fix tail-hood, and loosen this screw first while disassembly
⑤	Snap joint of fan	Used to fix fan, convenient to disassembly
⑥	Cooling fan	Internal heat dissipation of inverter
⑦	Control board	CPU board of inverter
⑧	Nameplate	
⑨	Snap joint of pre-cover	Used to fix pre-cover, total four on both left and right
⑩	Expansion board	Built-in multifunctional expansion board
⑪	Snap joint of tail-hood	Used to fix tail-hood, one on both left and right
⑫	Main loop terminal	

■ Basic wiring diagram

Basic wiring diagram

◎ Main circuit terminal

○ Control circuit terminal

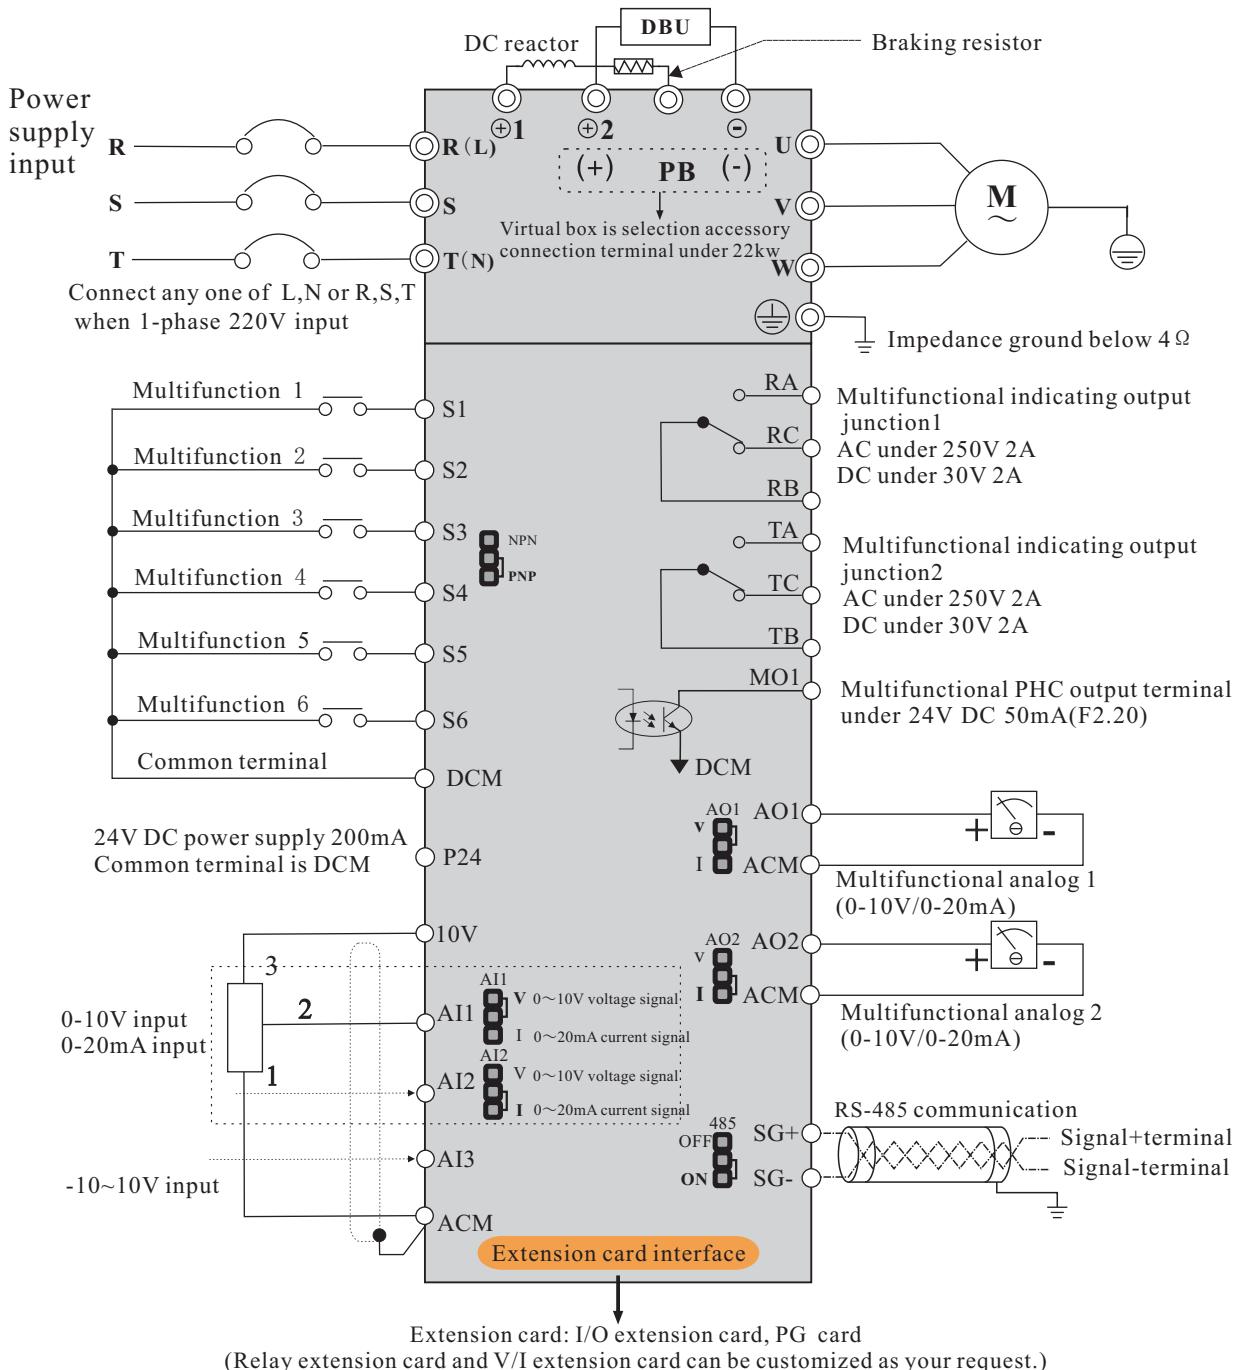

Notes: The general type inverters of 22KW and below have built-in brake unit, brake resistance (+) and PB terminal; (+) and (-) terminals are the plus or minus terminals of inverter's DC bus. Reserved direct current reactor connection terminals above 22KW, $\oplus 1 \oplus 2$, $\oplus 2$ and \ominus terminals are used to connect energy feedback unit or brake unit.

When brake unit is used in high-power inverters, you shall connect positive pole of brake unit to output terminal $\oplus 2$ of direct current reactor. If it is connected to $\oplus 1$ terminal, it will damage brake unit.

■ Model Selection


Models	Rated power (kW)	Rated input current (A)	Rated output current (A)	Adaptive motor (KW)
Input 1PH 240V±15% 47Hz-63Hz				
BD600-0R4G-2	0.55	5.4	4.0	0.55
BD600-0R7G-2	0.75	8.2	5.0	0.75
BD600-1R5G-2	1.5	14.0	7.0	1.5
BD600-2R2G-2	2.2	23	10.0	2.2

Models	Rated power (kW)	Rated input current (A)	Rated output current (A)	Adaptive motor (KW)
Input 3PH 415V±15% 47Hz-63Hz				
BD600-0R5G-2	0.55	3.8	3.2	0.55
BD600-0R7G-2	0.75	4.9	4.1	0.75
BD600-1R5G-2	1.5	8.4	7.0	1.5
BD600-2R2G-2	2.2	11.5	10.0	2.2
BD600-3R7G-2	3.7	18	15	3.7
BD600-5R5G-2	5.5	24	23	5.5
BD600-7R5G-2	7.5	37	31	7.5
BD600-011G-2	11	52	45	11
BD600-015G-2	15	68	58	15
BD600-018G-2	18.5	84	71	18.5
BD600-022G-2	22	94	85	22
BD600-030G-2	30	120	115	30
BD600-037G-2	37	160	145	37
BD600-045G-2	45	198	180	45
BD600-055G-2	55	237	215	55
BD600-075G-2	75	317	283	75




■ Model Selection

Models	Rated power (kW)	Rated input current (A)	Rated output current (A)	Adaptive motor (KW)
Input 3PH 415V±15% 47Hz-63Hz				
BD600-0R7G/1R5P-4	0.75/1.5	3.4/5.0	2.5/3.7	0.75/1.5
BD600-1R5G/2R2P-4	1.5/2.2	5.0/5.8	3.7/5.0	1.5/2.2
BD600-2R2G/3R7P-4	2.2/3.7	5.8/10.5	5.0/8.5	2.2/3.7
BD600-3R7G/5R5P-4	3.7/5.5	10.5/14.6	8.5/13	3.7/5.5
BD600-5R5G/7R5P-4	5.5/7.5	14.6/20.5	13/18	5.5/7.5
BD600-7R5G/011P-4	7.5/11	20.5/26	18/24	7.5/11
BD600-011G/015P-4	11/15	26/35	24/30	11/15
BD600-015G/018P-4	15/18.5	35/38.5	30/37	15/18.5
BD600-018G/022P-4	18.5/22	38.5/46.5	37/46	18.5/22
BD600-022G/030P-4	22/30	46.5/62	46/58	22/30
BD600-030G/037P-4	30/37	62/76	58/75	30/37
BD600-037G/045P-4	37/45	76/92	75/90	37/45
BD600-045G/055P-4	45/55	92/113	90/110	45/55
BD600-055G/075P-4	55/75	113/157	110/150	55/75
BD600-075G/093P-4	75/93	157/180	150/170	75/90
BD600-093G/110P-4	93/110	180/214	170/210	90/110
BD600-110G/132P-4	110/132	214/256	210/250	110/132
BD600-132G/160P-4	132/160	256/307	250/300	132/160
BD600-160G/200P-4	160/200	307/385	300/380	160/200
BD600-200G/220P-4	200/220	385/430	380/430	200/220
BD600-220G/250P-4	220/250	430/468	430/465	220/250
BD600-250G/280P-4	250/280	468/525	465/520	250/280
BD600-280G/315P-4	280/315	525/590	520/585	280/315
BD600-315G/350P-4	315/350	590/665	585/650	315/350
BD600-350G/400P-4	355/400	665/785	650/754	350/400
BD600-400G/500P-4	400/500	785/965	754/930	400/500
BD600-500G/630P-4	500/630	965/1210	930/1180	500/630
BD600-630G/710P-4	630/710	1210/1465	1180/1430	630/710

■ External Dimension

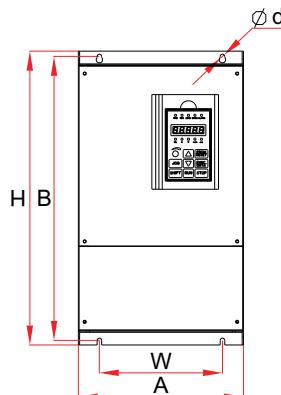

Wall-mounted housing

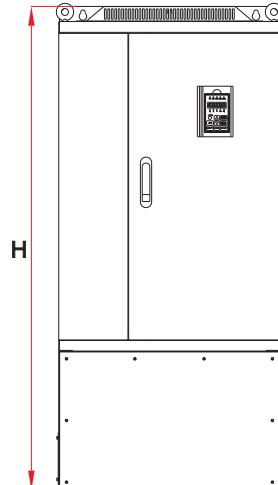

Wall-mounted/ Floor combination housing

Base NO.	Model	Power(kW)	Dimensions(mm)						Housing
			A(width)	H(height)	D(depth)	W	B	d	
B10	BD600-0R5G-2	0.55kW	116	175	153	103	165	5	wall mounted plastic housing
	BD600-0R7G-2	0.75kW							
	BD600-1R5G-2	1.5kW							
B01	BD600-2R2G-2	2.2kW	134	251	173	121	238	5	wall mounted plastic housing
	BD600-3R7G-2	3.7kW							
B02	BD600-5R5G-2	5.5kW	161	274	198	148	261	6	
	BD600-7R5G-2	7.5kW							

Base NO.	Model	Power(kW)	Dimensions(mm)						Housing
			A(width)	H(height)	D(depth)	W	B	d	
B10	BD600-0R7G/1R5G-4	0.75kW	116	175	153	103	165	5	wall mounted plastic housing
	BD600-1R5G/2R2G-4	1.5kW							
	BD600-2R2G/3R7G-4	2.2kW							
B01	BD600-3R7G/5R5G-4	3.7kW	134	251	173	121	238	5	

Note : B10 housing can not support PG card and extension card.

If need to add, please use B01 housing.

■ External Dimension

Base NO.	Model	Power(kW)	Dimensions(mm)						Housing
			A(width)	H(height)	D(depth)	W	B	d	
B02	BD600-5R5G/7R5P-4	5.5kW	161	274	198	148	261	6	wall mounted plastic housing
	BD600-7R5G/011P-4	7.5kW							
B03	BD600-011G/015P-4	11kW	210	343	215	195	327	6	
	BD600-015G/018P-4	15kW							
B11	BD600-018G/022P-4	18.5kW	220	393	222	160	377	6	
	BD600-022G/030P-4	22kW							
B04	BD600-030G/037P-4	30kW	255	453	237	190	440	7	
	BD600-037G/045P-4	37kW							
B05	BD600-045G/055P-4	45kW	280	582	295	200	563	9	
	BD600-055G/075P-4	55kW							
B06	BD600-075G/093P-4	75kW	300	685	323	200	667	11	wall mounted steel casing housing
	BD600-093G/110P-4	93kW							
B07	BD600-110G/132P-4	110kW	420	840	334	150*150	815	11	
	BD600-132G/160P-4	132kW							
	BD600-160G/200P-4	160kW							
B09	BD600-200G/220P-4	200kW	640	1035	390	250*250	1003	11	
	BD600-220G/250P-4	220kW							
	BD600-250G/280P-4	250kW							
	BD600-280G/315P-4	280kW							
	BD600-315G/350P-4	315kW							
B07-G	BD600-110G/132P-4	110kW	420	1108	334	320	230	12	
	BD600-132G/160P-4	132kW							
	BD600-160G/200P-4	160kW							
B09-G	BD600-200G/220P-4	200kW	640	1400	390	550	240	15	Floor type steel casing housing
	BD600-220G/250P-4	220kW							
	BD600-250G/280P-4	250kW							
	BD600-280G/315P-4	280kW							
	BD600-315G/350P-4	315kW							

■ Optional extension cards

RS485 communication card	A green printed circuit board with various electronic components, connectors, and a small microcontroller chip.	Differential encoder PG card	A green printed circuit board with a central microcontroller, several analog-to-digital converters, and a digital signal processor.	Resolver PG card	A green printed circuit board featuring a high-resolution optical encoder and associated driver and processing logic.
(BD-RS485)		(BD-PG03)		(BD-PG04)	

■ Optional brake unit and brake resistance

Voltage	AC Drive power	brake unit		brake resistance			brake torque (10%UD)
		model	pcs	power(W)/resistance	Ω	pcs	
240V	0.55kW	built-in	-	80	120	1	100%
	0.75kW		-	80	120	1	
	1.5kW		-	150	100	1	
	2.2kW		-	300	68	1	
	3.7kW		-	300	68	1	
	5.5kW		-	400	30	1	
	7.5kW		-	400	30	1	
415V	0.75kW		-	150	300	1	100%
	1.5kW		-	200	300	1	
	2.2kW		-	200	200	1	
	3.7kW		-	400	150	1	
	5.5kW		-	400	100	1	
	7.5kW		-	750	75	1	
	11kW		-	1000	60	1	
	15kW		-	1500	40	1	
	18.5kW		-	2500	30	1	
	22kW		-	3000	30	1	
	30kW	DBU-4030	1	5000	25	1	
	37kW	DBU-4045	1	7500	20	1	
	45kW		1	10000	13.6	1	
	55kW	DBU-4030	2	5000*2	25	1	
	75kW	DBU-4045	2	7500*2	15	1	
	93kW		2	10000*2	13.6	1	
	110kW	DBU-4160	1	20000	8	1	
	132kW		1	25000	6	1	
	160kW		1	30000	6	1	
	200kW		1	35000	4.5	1	
	220kW	DBU-4280	1	40000	4.5	1	
	250kW		1	45000	4	1	
	280kW		1	50000	3.5	1	
	315kW		1	55000	3	1	
	350kW		1	60000	2.5	1	
	400kW		1	60000	2.5	1	
	450kW		1	80000	2	1	

■ Other Products

➤ Low Voltage Inverters

- BD600 Series High Performance General Purpose Inverters
- BD330 Series High performance general purpose Inverters
- DZB200M Series Mini Economy Inverters
- DZB300 Series general purpose Inverters
- BD550 Series High Performance Vector Control Inverters
- BD570 Series High Performance Tri-level Inverters
- BD1000 Series High Performance Vector Control Inverters
- BD331 Series Special Inverters For pump Water Supply
- BD332 Series Special Inverters For Injection Machine
- BD333 Series Special Inverters For Textile Machine
- BD335 Series Special Inverters For dual-motor centrifugal machine
- BD336 Series open structure type inverters
- BD337 Series High-performance Inverters (IP53)
- BD338 Series Special Inverters For rotary cutter
- BD339 Series Special Inverters For air-compressor
- BD340 Series Special Inverters For variable-frequency power
- BD341 Series Special Inverters For Pile Machine
- DZB312 Series Special Inverters For Carving Machine (CNC Router)
- BD380 Series special for Injection Molding Machine
- BD381 Series special for Pumping Unit
- BD382 Series special for Frame Saw Machine
- BD383 Series special for Power source
- BD385 Series special for Molecular Pump Power Source

➤ Servo Drive System

- FS100 Series General-Purpose AC Servo
- FS110 Series General-Purpose AC Servo
- FS600 Series General-Purpose AC Servo
- FS200 Series PMSM Hydraulic System
- FS300 Series AC Asynchronous System
- FS510 Series PMSM Special For Air-Compressor

➤ Medium Voltage Inverters

- DZB10HV Series Medium Voltage Inverters
- DZB20HV Series Medium Voltage Inverters

➤ Others

- PFU100 Series High Performance General Energy Feedback Unit
- PFU110 Series High Performance Energy Feedback Unit
- DBU100 Series Braking Unit
- EH100 Series Small Power Electromagnetic Heating Controller





Authorised Distributor:

CONON MOTOR
28 Aristoc Rd, Glen Waverley, Vic. 3150
Phone: 03 8555 2518
Email: sales@cononmotor.com.au
Web: www.cononmotor.com.au

